

TM30N10D

N-Channel Enhancement Mosfet

General Description

- Low $R_{DS(ON)}$
- RoHS and Halogen-Free Compliant

Applications

- Load switch
- PWM


General Features

$V_{DS} = 100V$ $I_D = 30A$

$R_{DS(ON)} = 32m\Omega (typ.) @ V_{GS} = 10V$



100% UIS Tested

100% R_g Tested



Marking 30N10

D:TO-252-3L



Absolute Maximum Ratings ($T_C = 25^\circ C$ unless otherwise noted)

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	100	V
V_{GS}	Gate-Source Voltage	± 20	V
$I_D @ T_C = 25^\circ C$	Continuous Drain Current, $V_{GS} @ 10V^1$	30	A
$I_D @ T_C = 100^\circ C$	Continuous Drain Current, $V_{GS} @ 10V^1$	18	A
I_{DM}	Pulsed Drain Current ²	109	A
EAS	Single Pulse Avalanche Energy ³	40	mJ
I_{AS}	Avalanche Current	30	A
$P_D @ T_C = 25^\circ C$	Total Power Dissipation ³	43.7	W
T_{STG}	Storage Temperature Range	-55 to 150	$^\circ C$
T_J	Operating Junction Temperature Range	-55 to 150	$^\circ C$

Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction-ambient ¹	---	50	$^\circ C/W$
$R_{\theta JC}$	Thermal Resistance Junction-Case ¹	---	3.0	$^\circ C/W$

TM30N10D

N-Channel Enhancement Mosfet

Electrical Characteristics (T_J = 25°C, unless otherwise noted)

Parameter		Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Static Characteristics							
Drain-Source Breakdown Voltage		V _{(BR)DSS}	V _{GS} = 0V, I _D = 250μA	100	-	-	V
Gate-body Leakage current		I _{GSS}	V _{DS} = 0V, V _{GS} = ±20V	-	-	±100	nA
Zero Gate Voltage Drain Current	T _J =25°C	I _{DSS}	V _{DS} =100V, V _{GS} = 0V	-	-	1	μA
	T _J =100°C			-	-	100	
Gate-Threshold Voltage		V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250μA	1.2	2.0	2.8	V
Drain-Source on-Resistance ⁴		R _{DS(on)}	V _{GS} = 10V, I _D = 5A	-	32	37	mΩ
			V _{GS} = 4.5V, I _D = 3A	-	38	65	
Forward Transconductance ⁴		g _{fs}	V _{DS} =5V , I _D =5A	-	12	-	S
Dynamic Characteristics ⁵							
Input Capacitance		C _{iss}	V _{DS} = 15V, V _{GS} =0V, f =1MHz	-	2420	-	pF
Output Capacitance		C _{oss}		-	99	-	
Reverse Transfer Capacitance		C _{rss}		-	84	-	
Gate Resistance		R _g	f =1MHz	-	1.3	-	Ω
Switching Characteristics ⁵							
Total Gate Charge		Q _g	V _{GS} = 10V, V _{DS} = 50V, I _D =5A	-	40.6	-	nC
Gate-Source Charge		Q _{gs}		-	8	-	
Gate-Drain Charge		Q _{gd}		-	6.7	-	
Turn-On Delay Time		t _{d(on)}	V _{GS} =10V, V _{DD} =50V, R _G = 3Ω, I _D = 5A	-	8.7	-	ns
Rise Time		t _r		-	41	-	
Turn-Off Delay Time		t _{d(off)}		-	40	-	
Fall Time		t _f		-	32	-	
Drain-Source Body Diode Characteristics							
Diode Forward Voltage ⁴		V _{SD}	I _S = 1A, V _{GS} = 0V	-	-	1.2	V
Continuous Source Current	T _C =25°C	I _S	-	-	-	30	A

Notes:

1. Repetitive rating, pulse width limited by junction temperature T_{J(MAX)} = 150°C.
2. The data tested by pulsed, pulse width ≤ 300us, duty cycle ≤ 2%
3. The EAS data shows Max. rating. The test condition is V_{DD} = 25V, V_{GS} = 10V, L = 0.1mH, I_{AS} = 8A
4. The power dissipation is limited by 150°C junction temperature
5. The data is theoretically the same as I_D and I_{DM}, in real applications, should be limited by total power dissipation.

Typical Characteristics

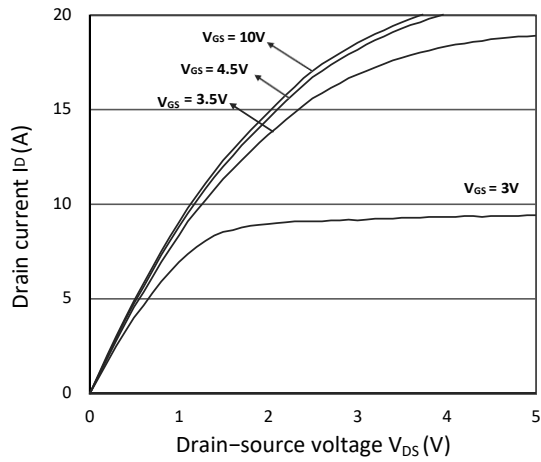


Figure 1. Output Characteristics

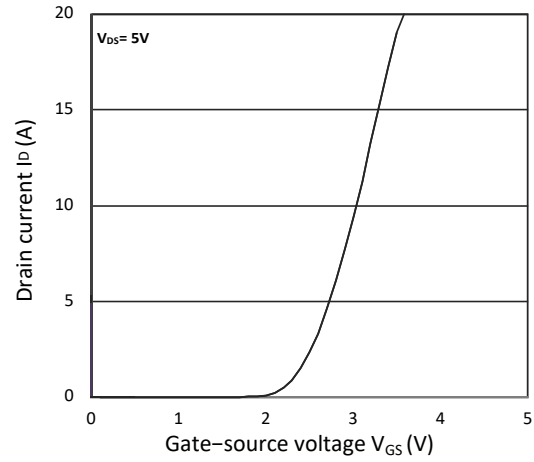


Figure 2. Transfer Characteristics

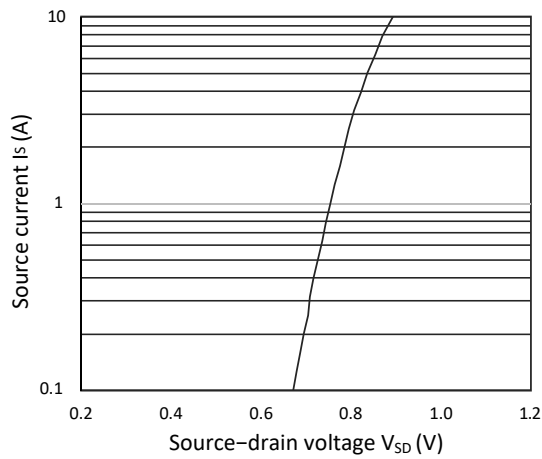


Figure 3. Forward Characteristics of Reverse

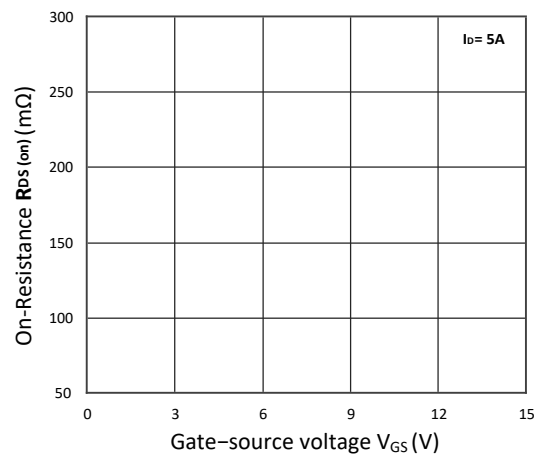


Figure 4. $R_{DS(on)}$ vs. V_{GS}

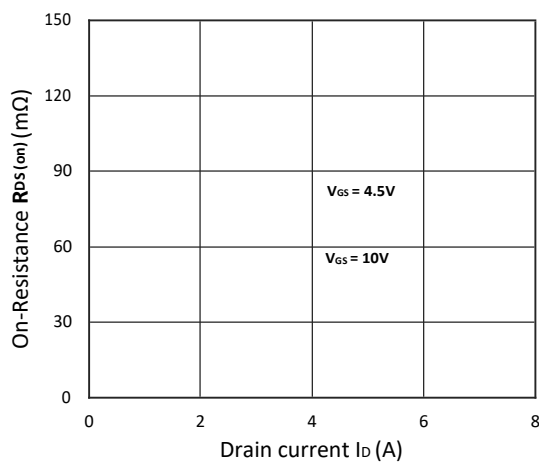


Figure 5. $R_{DS(on)}$ vs. I_D

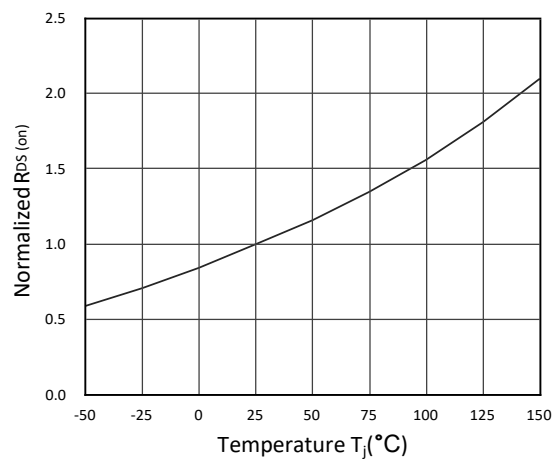


Figure 6. Normalized $R_{DS(on)}$ vs. Temperature

TM30N10D

N-Channel Enhancement Mosfet

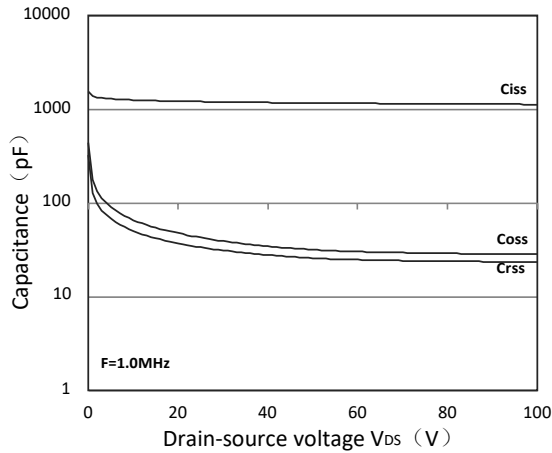


Figure 7. Capacitance Characteristics

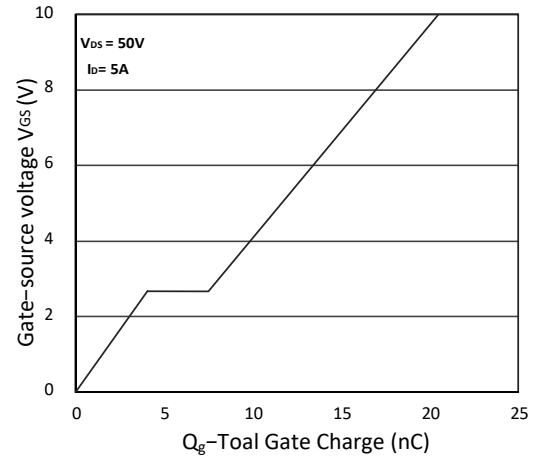


Figure 8. Gate Charge Characteristics

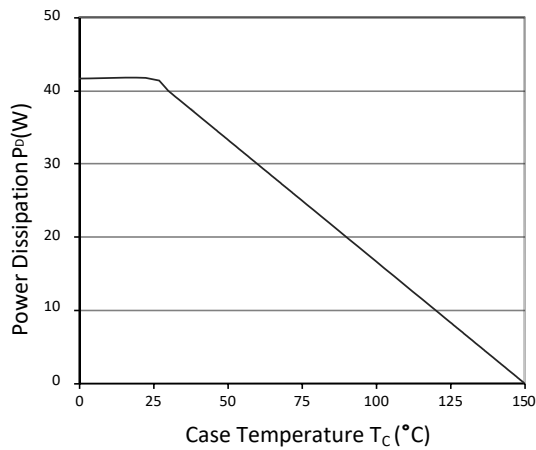


Figure 9. Power Dissipation

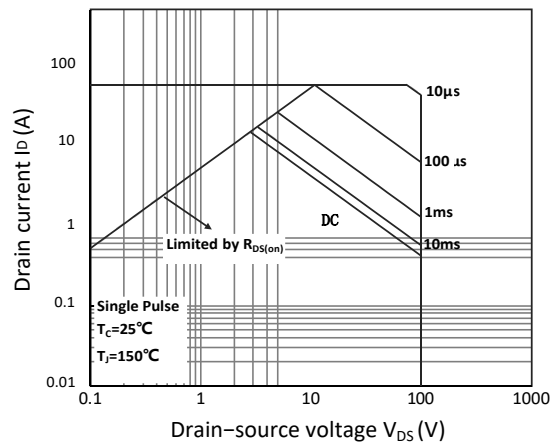


Figure10. Safe Operating Area


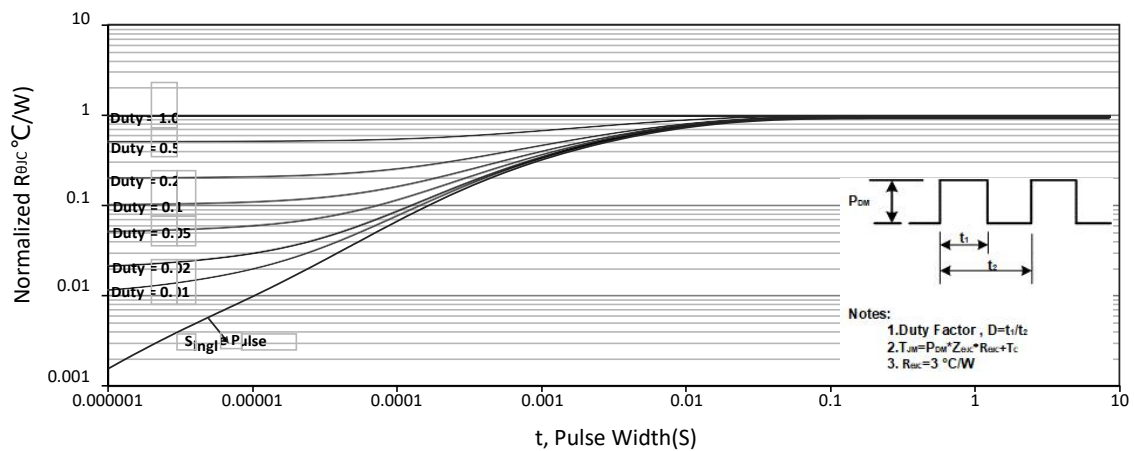


Figure 11. Normalized Maximum Transient Thermal Impedance

Package Mechanical Data: TO-252-3L

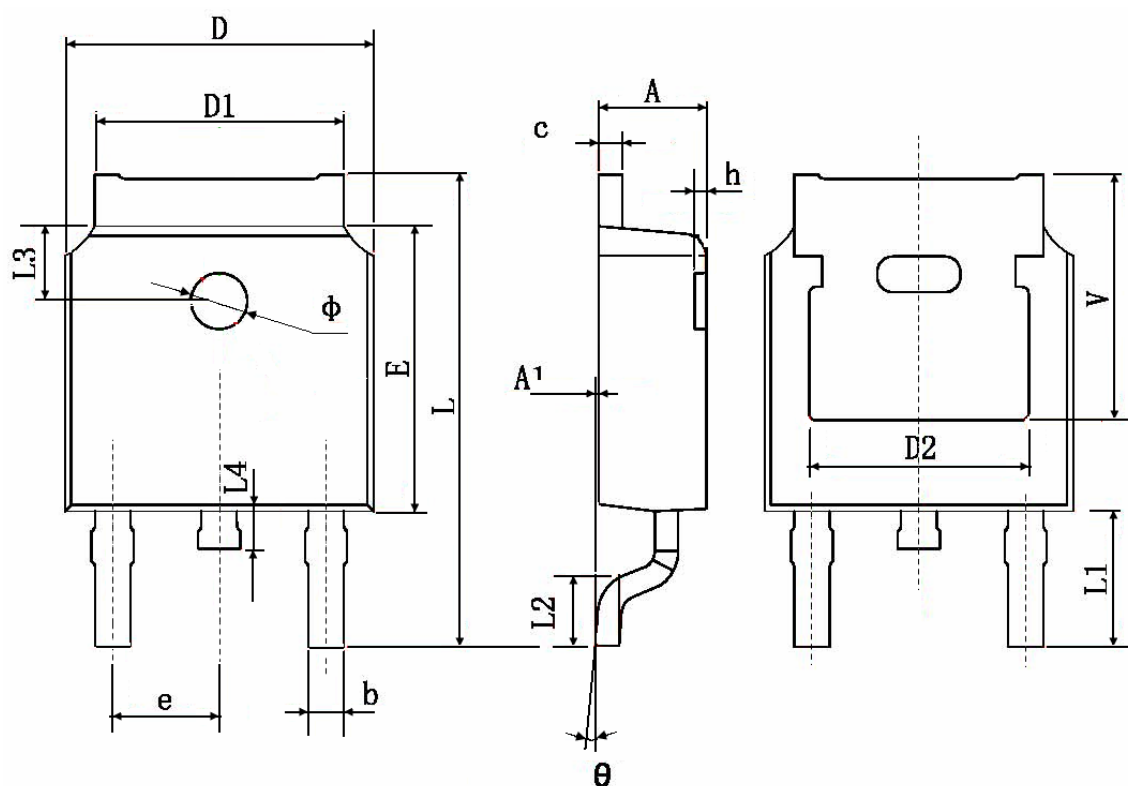

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
b	0.660	0.860	0.026	0.034
c	0.460	0.580	0.018	0.023
D	6.500	6.700	0.256	0.264
D1	5.100	5.460	0.201	0.215
D2	4.830 TYP.		0.190 TYP.	
E	6.000	6.200	0.236	0.244
e	2.186	2.386	0.086	0.094
L	9.800	10.400	0.386	0.409
L1	2.900 TYP.		0.114 TYP.	
L2	1.400	1.700	0.055	0.067
L3	1.600 TYP.		0.063 TYP.	
L4	0.600	1.000	0.024	0.039
Φ	1.100	1.300	0.043	0.051
θ	0°	8°	0°	8°
h	0.000	0.300	0.000	0.012
V	5.350 TYP.		0.211 TYP.	