




Electrical Characteristics ($T_J=25^\circ\text{C}$ unless otherwise noted)





Symbol	Parameter	Conditions	Min	Typ	Max	Unit
On/Off States						
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D=-250\mu A$	-30			V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS}=-30V, V_{GS}=0V$			-1	μA
I_{GSS}	Gate-Body Leakage Current	$V_{GS}=\pm 20V, V_{DS}=0V$			± 100	nA
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=-250\mu A$	-1	-1.5	-2.0	V
g_{FS}	Forward Transconductance	$V_{DS}=-5V, I_D=-20A$		65		S
$R_{DS(ON)}$	Drain-Source On-State Resistance	$V_{GS}=-10V, I_D=-20A$		3.0	4.5	$m\Omega$
		$V_{GS}=-4.5V, I_D=-20A$		4.4	5.5	$m\Omega$
Dynamic Characteristics						
C_{iss}	Input Capacitance	$V_{DS}=-15V, V_{GS}=0V, f=1.0MHz$		6500		μF
C_{oss}	Output Capacitance			820		μF
C_{rss}	Reverse Transfer Capacitance			540		μF
R_g	Gate resistance	$V_{GS}=0V, V_{DS}=0V, f=1.0MHz$		2.2		Ω
Switching Parameters						
$t_{d(on)}$	Turn-on Delay Time	$V_{GS}=-10V, V_{DS}=-15V, R_L=0.75\Omega, R_{GEN}=3\Omega$		14		nS
t_r	Turn-on Rise Time			13		nS
$t_{d(off)}$	Turn-Off Delay Time			65		nS
t_f	Turn-Off Fall Time			37		nS
Q_g	Total Gate Charge	$V_{GS}=-10V, V_{DS}=-15V, I_D=-20A$		130		nC
Q_{gs}	Gate-Source Charge			12		nC
Q_{gd}	Gate-Drain Charge			31		nC
Source-Drain Diode Characteristics						
I_{SD}	Source-Drain Current (Body Diode)				-120	A
V_{SD}	Forward on Voltage (Note 3)	$V_{GS}=0V, I_S=-20A$			-1.2	V
t_{rr}	Reverse Recovery Time	$I_F=-20A, di/dt=100A/\mu s$		30		ns
Q_{rr}	Reverse Recovery Charge	$I_F=-20A, di/dt=100A/\mu s$		40		nC

Notes 1.Repetitive Rating: Pulse width limited by maximum junction temperature.


Notes 2. E_{AS} condition: $T_J=25^\circ\text{C}, V_{DD}=15V, V_G=-10V, R_g=25\Omega, L=0.5mH$.

Typical Electrical And Thermal Characteristics (Curves)

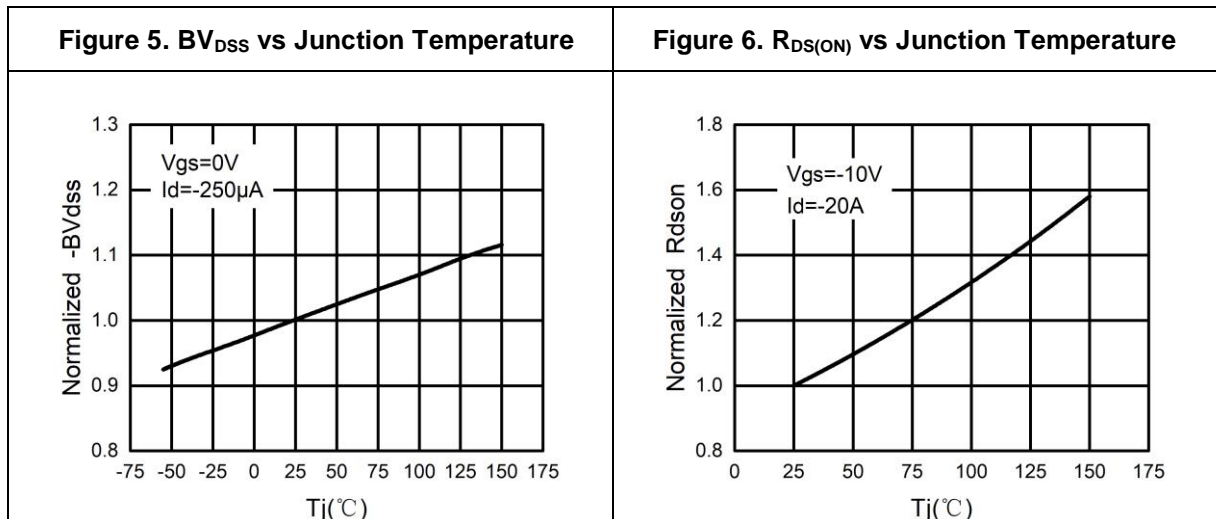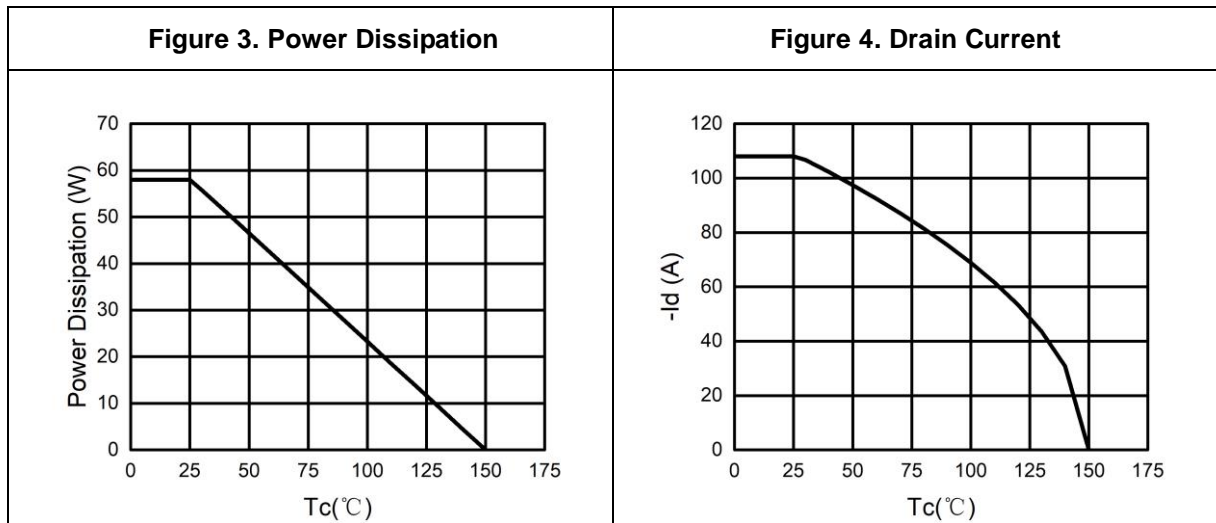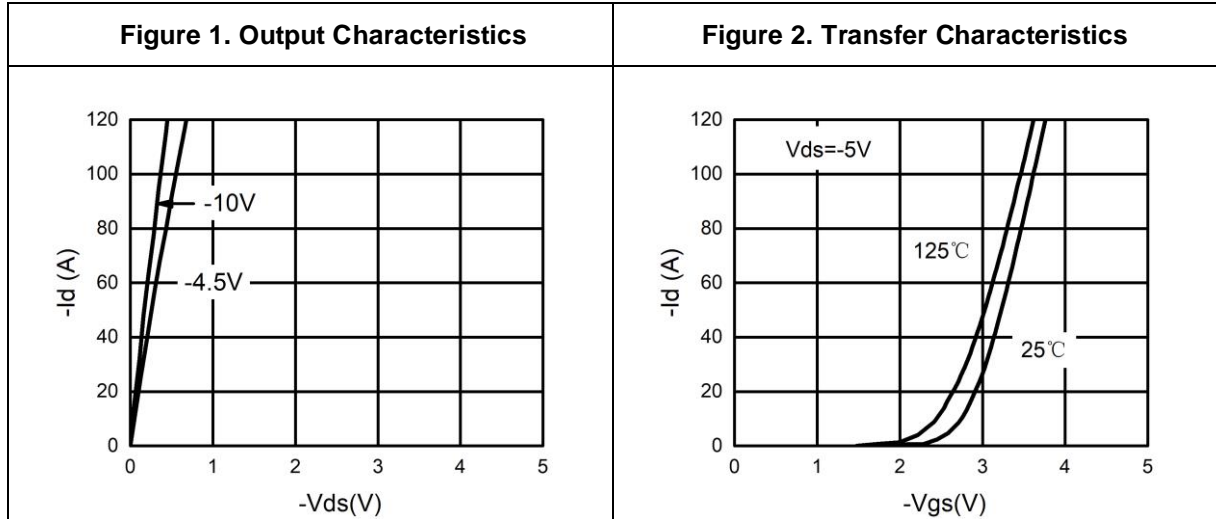

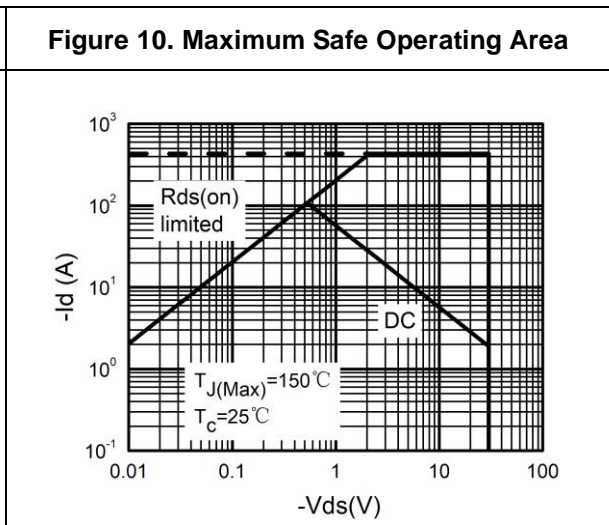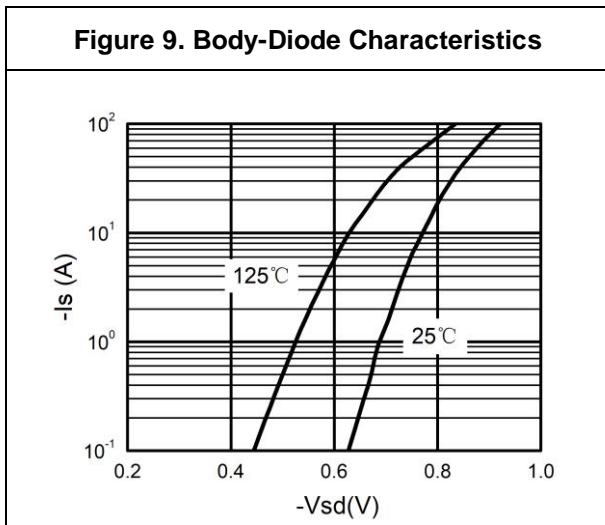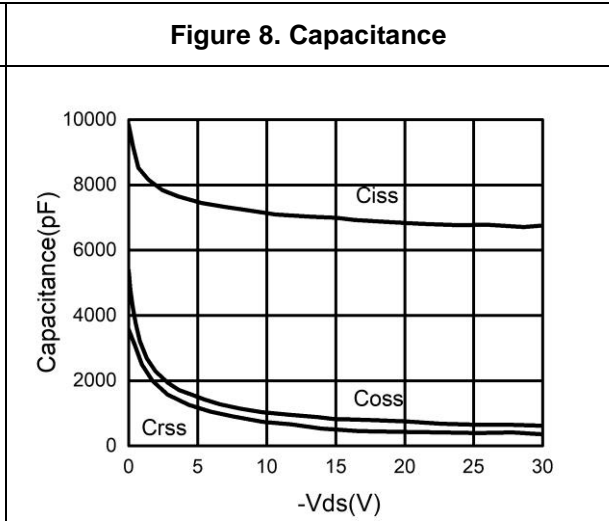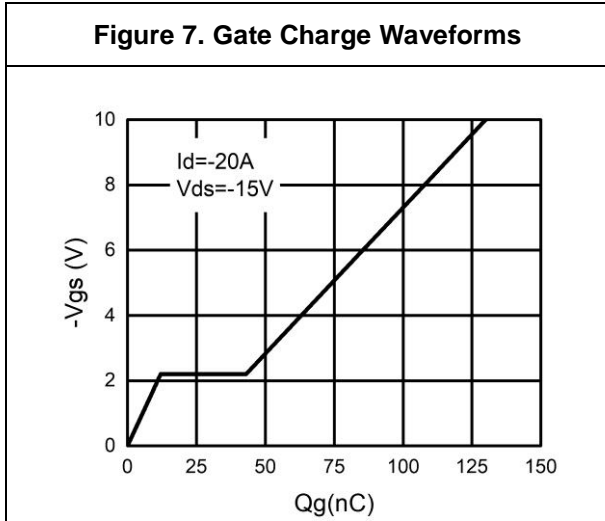

Package Information:TO-252-3L

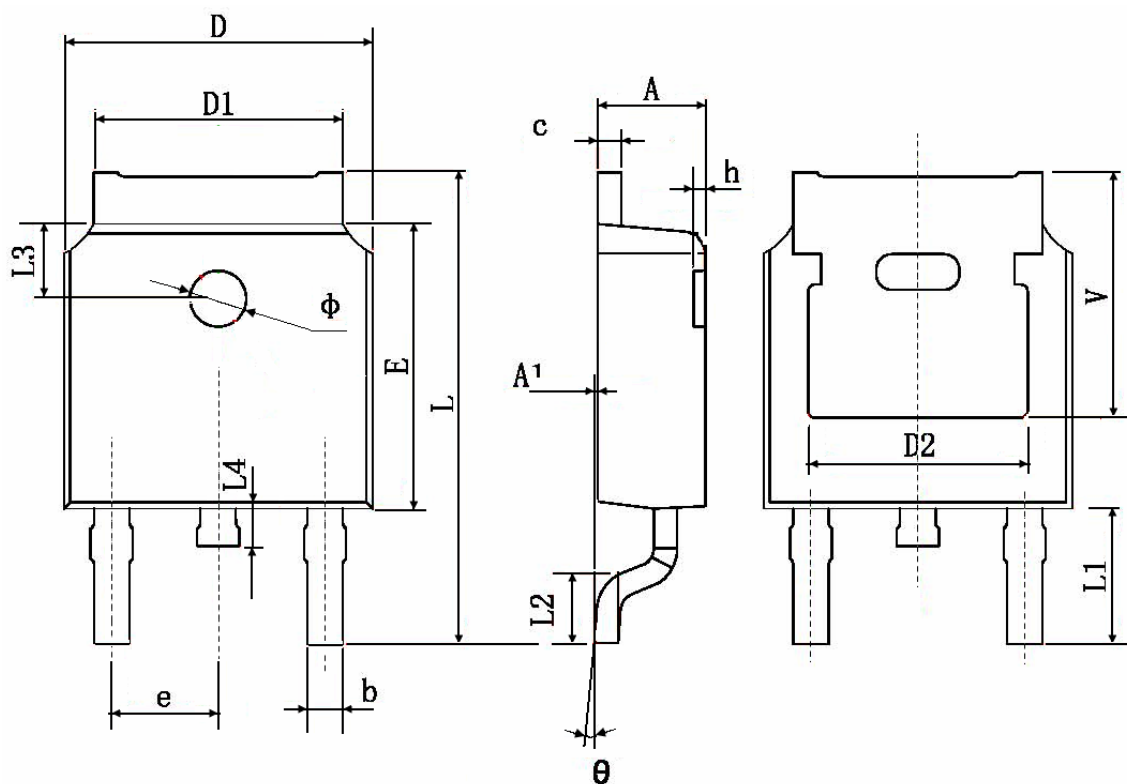

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
b	0.660	0.860	0.026	0.034
c	0.460	0.580	0.018	0.023
D	6.500	6.700	0.256	0.264
D1	5.100	5.460	0.201	0.215
D2	4.830 TYP.		0.190 TYP.	
E	6.000	6.200	0.236	0.244
e	2.186	2.386	0.086	0.094
L	9.800	10.400	0.386	0.409
L1	2.900 TYP.		0.114 TYP.	
L2	1.400	1.700	0.055	0.067
L3	1.600 TYP.		0.063 TYP.	
L4	0.600	1.000	0.024	0.039
φ	1.100	1.300	0.043	0.051
θ	0°	8°	0°	8°
h	0.000	0.300	0.000	0.012
V	5.350 TYP.		0.211 TYP.	